


Name: _____
 Date: _____
 Track: _____

Track Conditions


Size: ☐ Open ☐ Med. ☐ Tight
 Traction: ☐ High ☐ Med. ☐ Low
 Surface: ☐ Smooth ☐ Med. ☐ Bumpy

Front Suspension

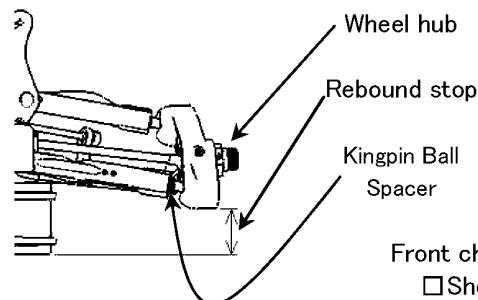

Front ride height _____ mm
 Kingpin ball spacer _____ mm
 Camber angle _____ °
 Upper arm spacer _____ mm
 Toe angle _____ °
 Rebound stop _____ mm
 Anti-roll bar _____ mm
 Wheel Hub _____ mm
 Lower arm mount (Kick up) _____ mm

Front chassis stiffener ☐ 0
☐ Short (Std EU) ☐ Long

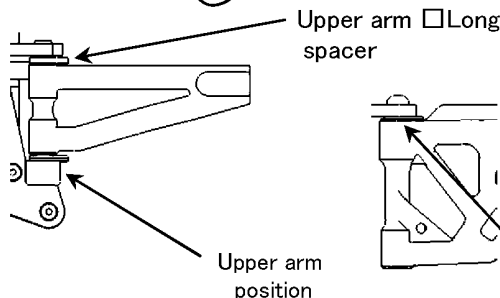


Lower arm plate (E0154A) ☐ ☐

Upper arm position (E0148B, E0148C) ☐ ☐ ☐


Lower arm spacer _____ mm

Front Shocks


Piston _____
 Oil _____
 Spring _____
 Spring adjustment _____ mm

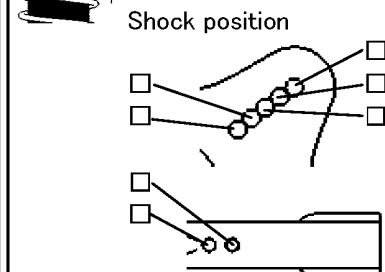

Steering Ackerman



Rear Suspension

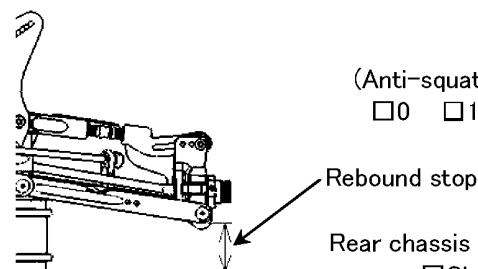


Rear ride height _____ mm
 Camber angle _____ °
 Lower arm mount _____ mm

(Anti-squat) ☐ 0 ☐ 1 ☐ E0185 (Aluminium) (Toe angle) _____ °


Rebound stop _____ mm
 Anti-roll bar _____ mm

Rear chassis stiffener Anti-squat (E0111C, E0111D) ☐ Short (Ally) ☐ Long (Std EU)

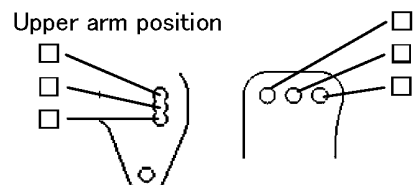


Upright ☐ E0152 ☐ E0173 (Aluminium)

Wheelbase adjustment _____ mm

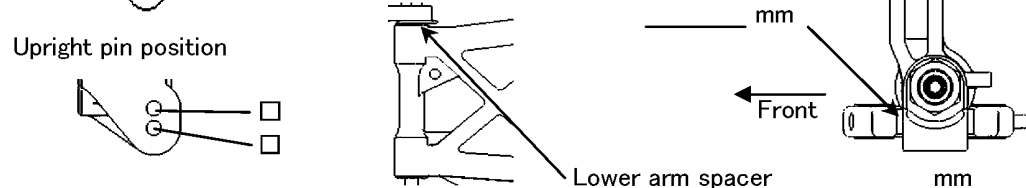


Rear Shocks

Piston _____
 Oil # _____
 Spring _____
 Spring adjustment _____ mm

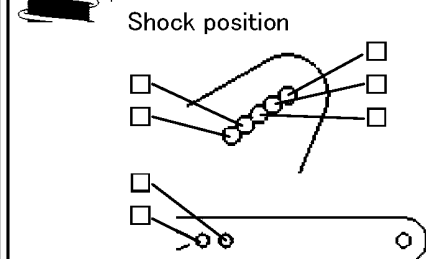

Wing Position



Engine

Type _____
 Gasket _____ mm Reducer _____
 Plug _____ Fuel _____
 Muffler _____

Diff. Oil

Front # _____ O-Ring _____ pcs. ☐ Other _____
 Center # _____ _____ pcs. ☐ Other _____
 Rear # _____ _____ pcs. ☐ Other _____

Tire

Front Type _____ Rear Type _____
 Foam _____ Foam _____

Clutch

Clutch shoes ☐ Aluminium _____
☐ Other _____
 Spring _____ mm
 Clutch bell / Spur gear _____

Result

Race time / Lap _____
 Best lap (1Lap) _____

Comments:

